NOTE: SWALE PAVING WILL BE REQUIRED TO CONTROL EROSION WHEN THE ALLOWABLE DITCH VELOCITIES ARE EXCEEDED PER ST805(a) 3.

PROVIDE CUTOFF WALLS AT END OF PAVING.

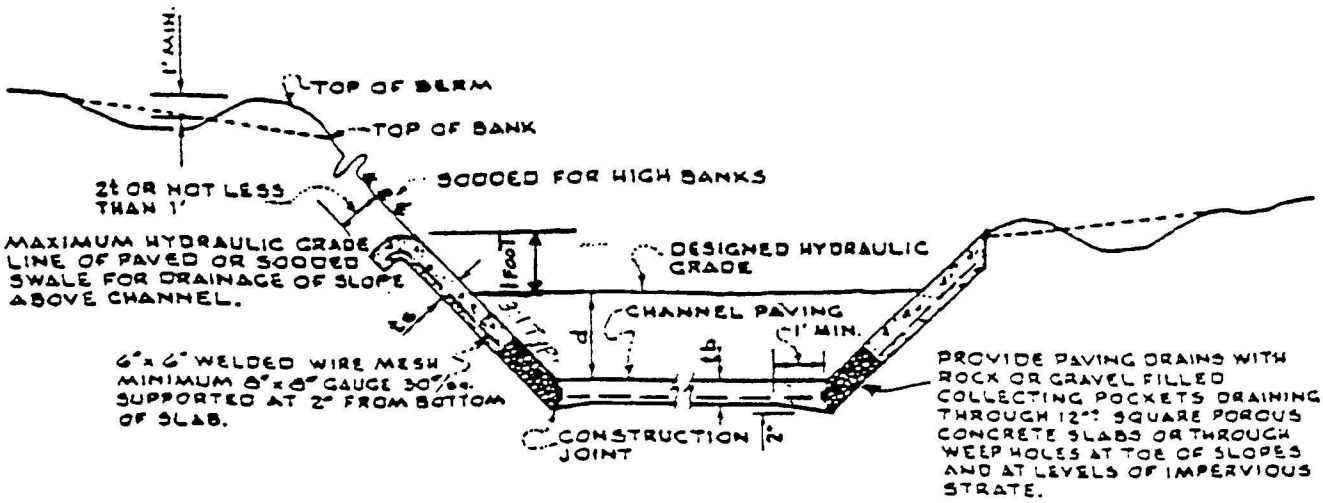

TYPICAL SECTION FOR PAVED CHANNEL

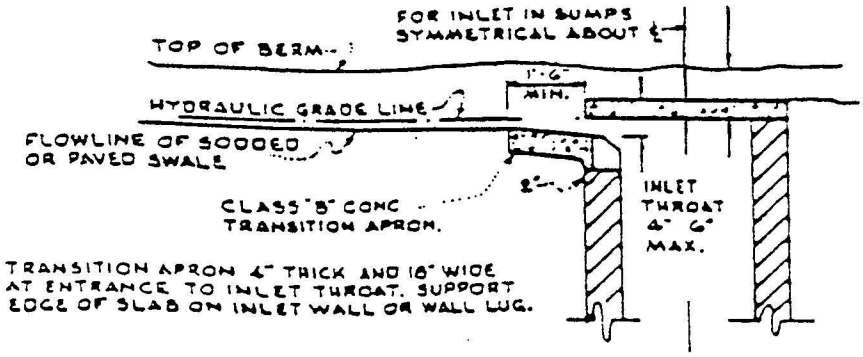

WIDTH	ts	tb
LESS THAN 6'	4"	4"
6' to 18'	4"	5"
18' to 24'	5"	6"
MORE THAN 24'	6"	7"

TYPICAL SECTION THROUGH SWALE AT INLET

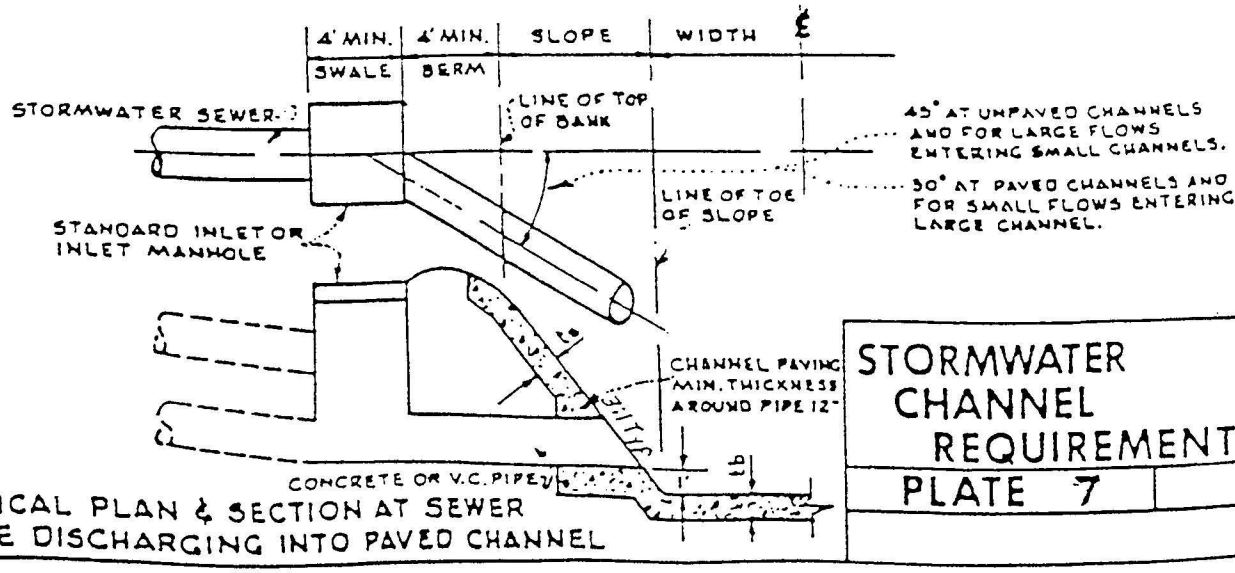

TYPICAL PLAN & SECTION AT SEWER LINE DISCHARGING INTO PAVED CHANNEL

STORMWATER CHANNEL REQUIREMENTS

PLATE 7