EXHIBIT NO. 28

Culvert Design Form

PROJECT : _____

STATION : _____

SHEET _____ OF _____

CULVERT DESIGN FORM

DESIGNER / DATE : _____ / _____

REVIEWER / DATE : _____ / _____

HYDROLOGICAL DATA

SEE ADD'L. SHTS.

- ☐ METHOD : _____
- ☐ DRAINAGE AREA : _____ ☐ STREAM SLOPE : _____
- ☐ CHANNEL SHAPE : _____
- ☐ ROUTING : _____ ☐ OTHER : _____

DESIGN FLOWS / TAILWATER

R.I. (YEARS)	FLOW (cfs)	TW (ft)

ROADWAY ELEVATION : _____ (ft)

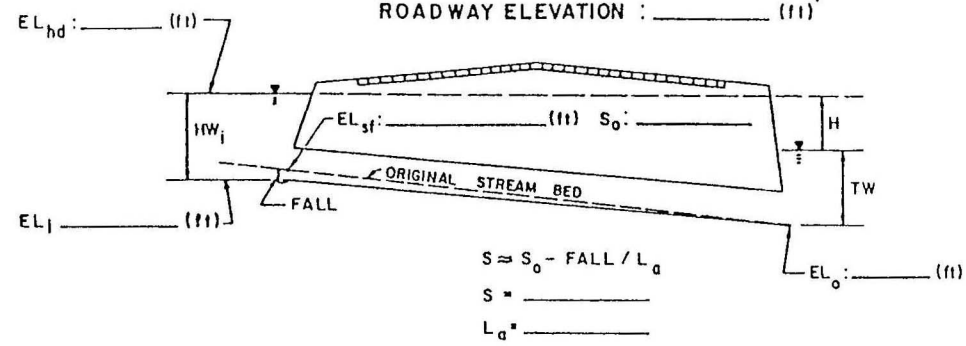

$S \approx S_o - FALL / L_a$

$S =$ _____

$L_a =$ _____

CULVERT DESCRIPTION: MATERIAL - SHAPE - SIZE - ENTRANCE	TOTAL FLOW Q (cfs)	FLOW PER BARREL Q/N (1)	HEADWATER CALCULATIONS — INLET CONTROL: HW_i/D (2)	HW_i	FALL (3)	EL_{hi} (4)	OUTLET CONTROL: TW (5)	d_c	$\frac{d_c+D}{2}$	h_o (6)	k_e	H (7)	EL_{ho} (8)	CONTROL HEADWATER ELEVATION	OUTLET VELOCITY	COMMENTS

TECHNICAL FOOTNOTES:

(1) USE Q/NB FOR BOX CULVERTS

(2) $HW_i/D = HW/D$ OR HW_1/D FROM DESIGN CHARTS

(3) $FALL = HW_i - (EL_{hd} - EL_{sf})$; FALL IS ZERO FOR CULVERTS ON GRADE

(4) $EL_{hi} = HW_i + EL_i$ (INVERT OF INLET CONTROL SECTION)

(5) TW BASED ON DOWN STREAM CONTROL OR FLOW DEPTH IN CHANNEL.

(6) $h_o = TW$ or $(d_c + D/2)$ (WHICHEVER IS GREATER)

(7) $H = \left[1 + k_e + (29n^2 L)/R^{1.33}\right] V^2/2g$

(8) $EL_{ho} = EL_o + H + h_o$

SUBSCRIPT DEFINITIONS :

a. APPROXIMATE
f. CULVERT FACE
hd. DESIGN HEADWATER
hi. HEADWATER IN INLET CONTROL
ho. HEADWATER IN OUTLET CONTROL
i. INLET CONTROL SECTION
o. OUTLET
sf. STREAMBED AT CULVERT FACE
tw. TAILWATER

COMMENTS / DISCUSSION :

CULVERT BARREL SELECTED :

SIZE : _____

SHAPE : _____

MATERIAL : _____ n _____

ENTRANCE : _____